



MODELS 61, 62, 63

WEATHERPROOF™
WIRE-NUT®
 WIRE CONNETORS

FEATURES/BENEFITS:



- EASY TO APPLY, PRE-FILLED TWIST-ON WIRE CONNECTORS
- SILICONE-BASED SEALANT PROTECTS AGAINST MOISTURE AND CORROSION
- UL LISTED FOR INTERIOR AND EXTERIOR DAMP/WET LOCATIONS
- WIDE WIRE RANGE ENABLES USE ON VARIETY OF APPLICATIONS INCLUDING OUTDOOR POWER OUTLETS, OUTDOOR SIGNAGE, AND EXTERIOR AREA LIGHTING

ELECTRICAL:

VOLTAGE: 600 V MAX

APPLICATION TOOLING:

- Spin-Twist® Wire Connector Socket

PHYSICAL:

HOUSING: THERMOPLASTIC POLYESTER
 INSERT: STEEL
 PLATING: ZINC
 TEMPERATURE: 105 C (221 F)

STANDARDS & SPECIFICATIONS:


UL 486C
 UL 486D FOR DIRECT BURIAL
 UL 94V-2 FLAME RATING
 CSA- C22.2 NO. 188
 CSA- C22.2 NO. 198.2 FOR DIRECT BURIAL
 RoHS COMPLIANT
 IEC 998-2-4
 IP 55 TESTED

WIRE RANGE:

- Solid and/or stranded wire combinations unless stated otherwise
- Consult factory for other combinations not listed

MODEL 61 (BLUE/ORANGE)	MODEL 62 (BLUE/RED)	MODEL 63 (BLUE/DARK BLUE)
STRIP LENGTH: 3/8" (9,5mm)	STRIP LENGTH: 5/8" (15,9mm)	STRIP LENGTH: 5/8" (15,9mm)
1 or 2 #14 2 #16 1 to 4 # 18 Str. 2 to 4 #18 Sol. 2 to 4 #20	1 to 3#10 1 to 4 #12 Sol. 1 to 3 #12 1 to 5 #14 1 to 6 #16 2 to 6 #18	1 or 2 #8 2 to 5 #10 2 to 6 #12 1 to 3 #14

DIMENSIONS:

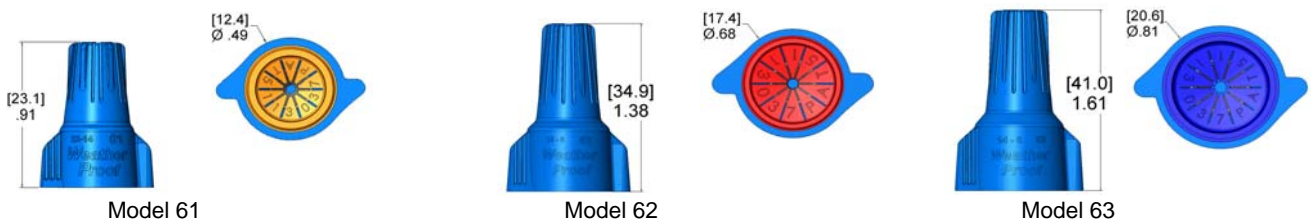

ORDERING INFO:

CATALOG #	MODEL	COLOR:	PACKAGE TYPE:	WEIGHT LBS (KG):
30-361	61	Blue/Orange	Box of 1,000	5.3 (2.4)
30-362	62	Blue/Red	Box of 1,000	12.3 (5.6)
30-363	63	Blue/Dark Blue	Box of 1,000	17.9 (8.1)

FACTORY CONTACT:

ENGINEERED SOLUTIONS
 IDEAL INDUSTRIES, INC.
 BECKER PLACE SYCAMORE IL
 USA 60178
 P: 1-800-324-9571
 F: 1-888-222-6140
 E: oem@idealindustries.com

SALES CONTACT: